


# 7 BW4-CTM-F-RL (CE)

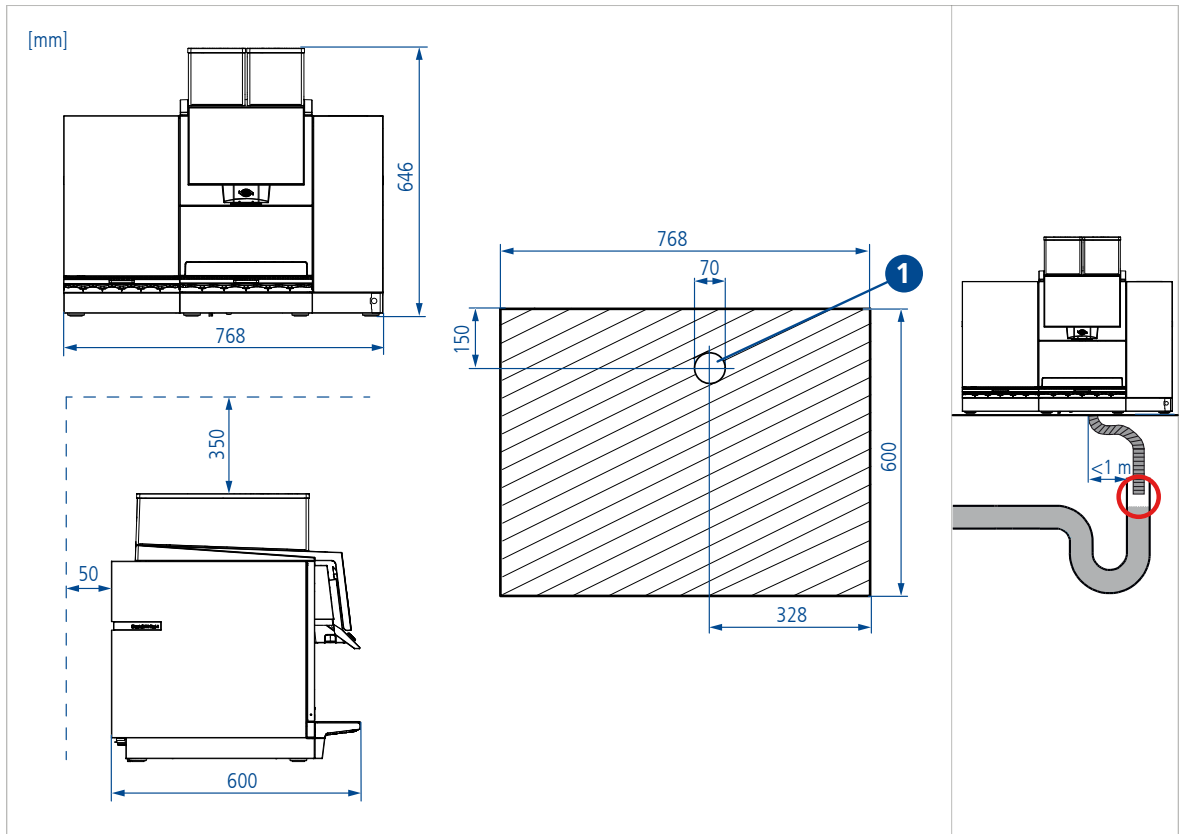

1 Hole diameter of 70 mm for water/milk inlet and water drain. Also possible for power cord.

### Drain

- Distance of machine to drain < 1 m.
- The drain line (hose) must not sag.
- No back pressure in the water line.
- The end of the line must not be submerged in water.

Machine parameters		Water connection specifications		
<b>Connection/ Power</b>	1-phase:	<b>Water supply</b>	3/8"	
	220-240 VAC / 50-60 Hz		<b>Dynamic Water pressure</b>	2-4 bar
	5800-7100 W / 32 A			<b>Water boiler pressure</b>
	3-phase:		<b>Steam boiler pressure</b>	
	380-415 VAC/50-60 Hz			
	5800-7100 W/3 x 16 A			
<b>Dimensions (W/D/H)</b>	768 x 600 x 646 mm	<b>Chlorine</b>	None	
<b>Outlet height</b>	85-172 mm (manual)	<b>TDS</b>	70-200 ppm	
	96-192 mm (autom.)			
<b>Weight</b>	95 kg	<b>Total hardness</b>	5-8 °dH	
		<b>pH</b>	6.8-7.4	
		<b>Alkalinity</b>	<100 ppm	
		<b>Iron</b>	<0.25 ppm	