


3 BW4-CTM-RL (CE)

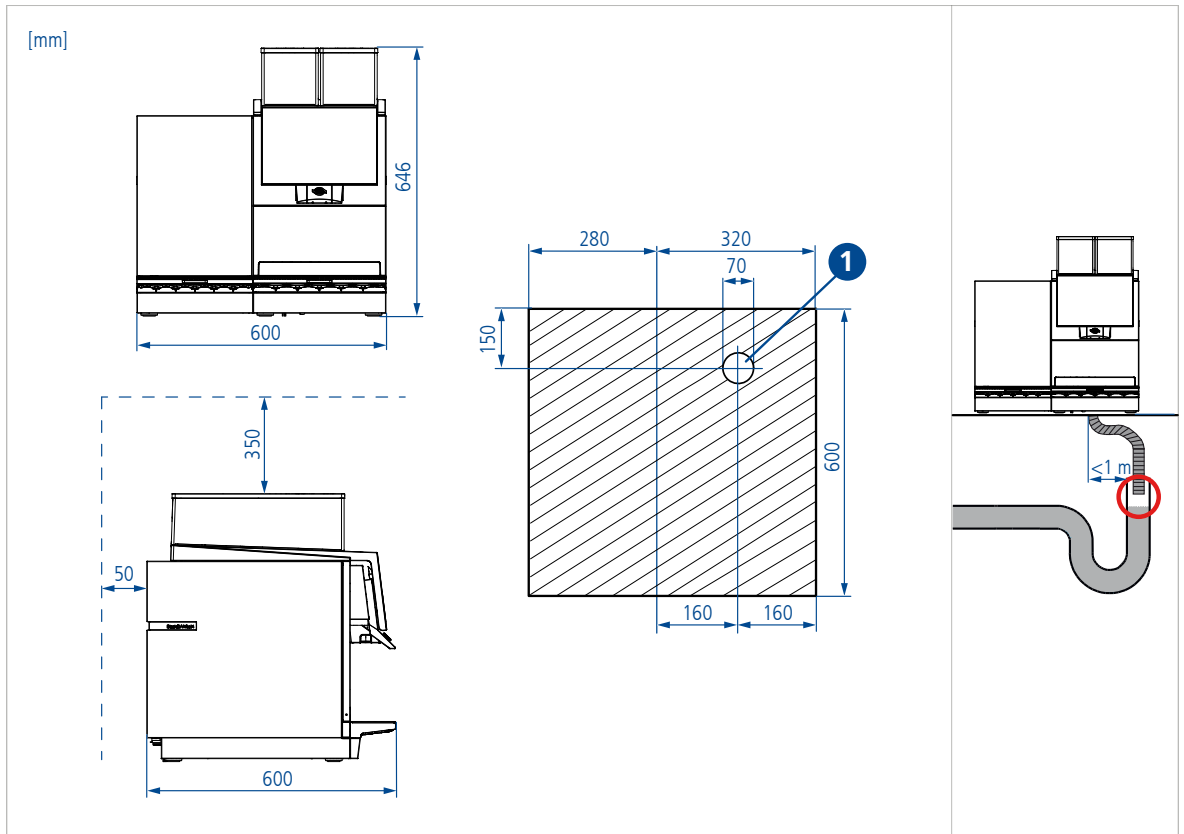

1 Hole diameter of 70 mm for water/milk inlet and water drain. Also possible for power cord.

Drain

- Distance of machine to drain <math>< 1\text{ m}</math>.
- The drain line (hose) must not sag.
- No back pressure in the water line.
- The end of the line must not be submerged in water.

Machine parameters		Water connection specifications	
Connection/ Power	1-phase: 220-240 VAC / 50-60 Hz 5800-7100 W / 32 A	Water supply	3/8"
	3-phase: 380-415 VAC/50-60 Hz 5800-7100 W/3 x 16 A	Dynamic Water pressure	2-4 bar
Dimensions (W/D/H)	600 x 600 x 646 mm	Water boiler pressure	11.7 bar
		Steam boiler pressure	2.6 bar
Outlet height	85-172 mm (manual) 96-192 mm (autom.)	Chlorine	None
Weight	80 kg	TDS	70-200 ppm
		Total hardness	5-8 °dH
		pH	6.8-7.4
		Alkalinity	<100 ppm
		Iron	<0.25 ppm