



Client _____ Quantity _____
 Project _____ Position _____

Smart 1400 cabinet

Model: A140/2ME

Cod: A12140200201

Technical data

| | |
|---------------------------------|---------------------------------|
| Gross capacity: | 1356 lt |
| Temperature range: | -2°+8°C |
| Refrigerant unit: | Plug-In |
| Energetic class: | B |
| Energy efficiency index: | 31,6 |
| Annual consumption: | 659 kW/h annum |
| 24h consumption: | 1,805 kW/h/24h |
| Climate class: | 5 |
| Cooling gas: | R290 |
| Defrost: | Hot gas |
| Valve: | Supplied standard with solenoid |
| Dimensions: | 1480×815×2085 mm |
| Packing dimensions: | 1575×930×2250 mm |
| Gross weight: | 220 Kg |
| Voltage: | 220-240 V - 50 Hz |
| Total rate: | 260 W |
| Absorbed Current: | 1,2 A |
| Cooling capacity: | 533 W* |
| *: | Evap. -10°C Cond. +55°C |

Features

| | |
|-------------------------------------|---|
| Standard equipment: | 6 slides for GN2/1 shelves, 6 plastic coated GN2/1 shelves, lock with key |
| Control: | Electronic, display flush with the panel |
| Doors: | 2 doors, self-closing with a 105° stop, right hinged |
| Door gasket: | Magnetic, triple chamber and easily replaceable |
| Insulation: | 75 mm thickness - CFC/HCFC free |
| Exterior/interior finishing: | Exterior and interior AISI 304 stainless steel. Back, base and internal technical compartment in galvanized/ colaminated steel. |
| Inner corners: | Rounded for easy cleaning and ensuring maximum hygiene |
| Handle: | In PVC |
| Racks and slides: | Stainless steel AISI 304 |
| Feets: | Stainless steel AISI 304, adjustable h 100-150 mm |
| Cosmo: | Ready for connection to Cosmo Hub |

Accessories and variants


Power supply frequency 60Hz
 Other special voltage
 Half doors (4 doors) Smart
 Frame for fixed masonry plinth
 Kit für Öffnung der Tür mit Pedal
 4 Swivel and brake castors h 128 mm
 2 doors LED lighting
 Stainless steel shelf GN2/1
 Plastic coated shelf GN2/1
 Pair of type C slides 605 mm
 Intermediate shelf connection
 Serial interface, RS485 cable
 Cosmo connection kit

COSMO - wi-fi control

Cosmo is the wi-fi technology that allow to connect and monitor all Coldline appliances. Connect Smart cabinets to a Cosmo hub (MODI, VISION or LEVTRONIC) and from the app you can check the operating conditions of each machine and receive alerts in case of abnormal functioning.

*The installation requires a kit for the replacement of the racks

Technical draw

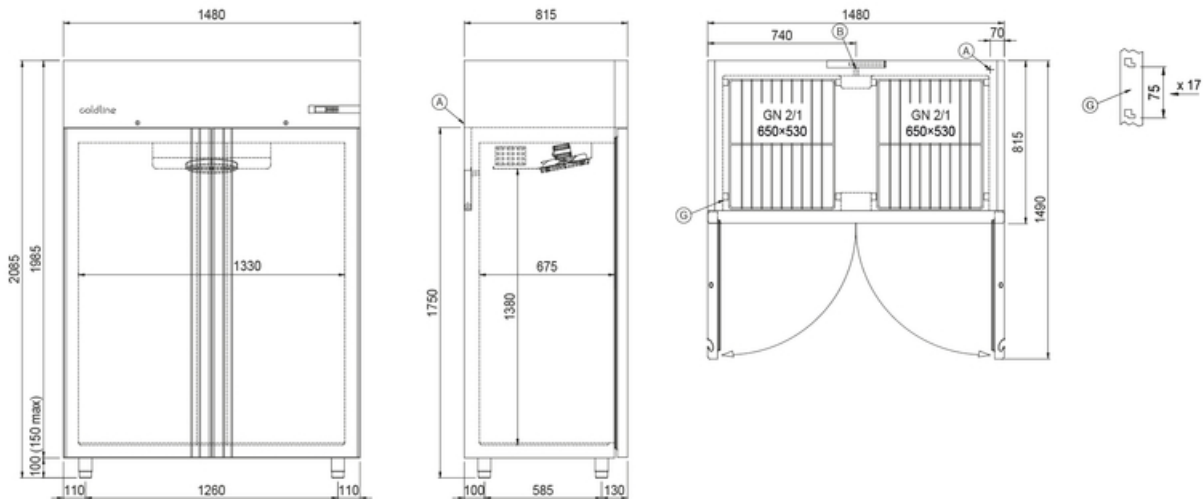

A: Power supply cable outlet

D: Airflow conveyor

G: Racks pitch